

When the System Program Switch on the KX-T30810B is set to the PROGRAM position, the operation of the KX-T7030 and the KX-T7130 will change as follows.

KX-T7030


โปรแกรมสวิตช์ระบบ พี. เอ. บี. เอ็มซี.

30/270 ซอยนวมินทร์ 80 แขวงนวลจันทร์ เขตบึงกุ่ม กรุงเทพฯ 10230


Hotline : 084-920-5065 Tel : 02-519-1718 , 02-107-3057

E.Mail : info@pfpbx.com , jirasak_service@hotmail.com


www.pfpbx.com

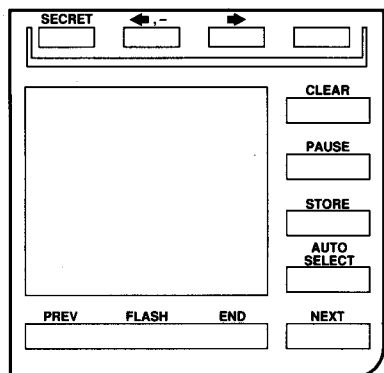


Overlay

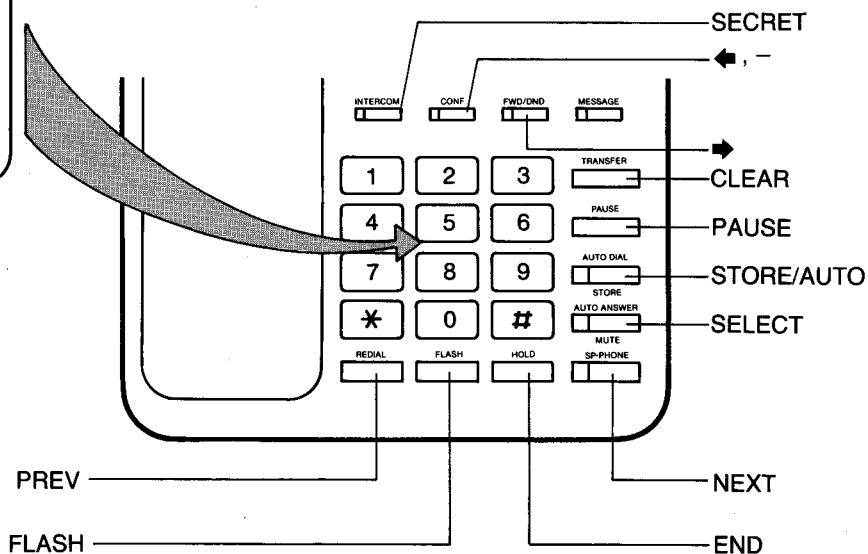

KX-T7130

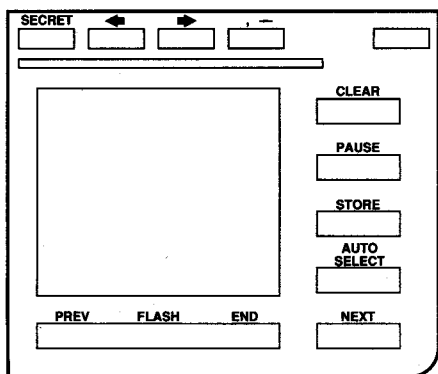

Overlay

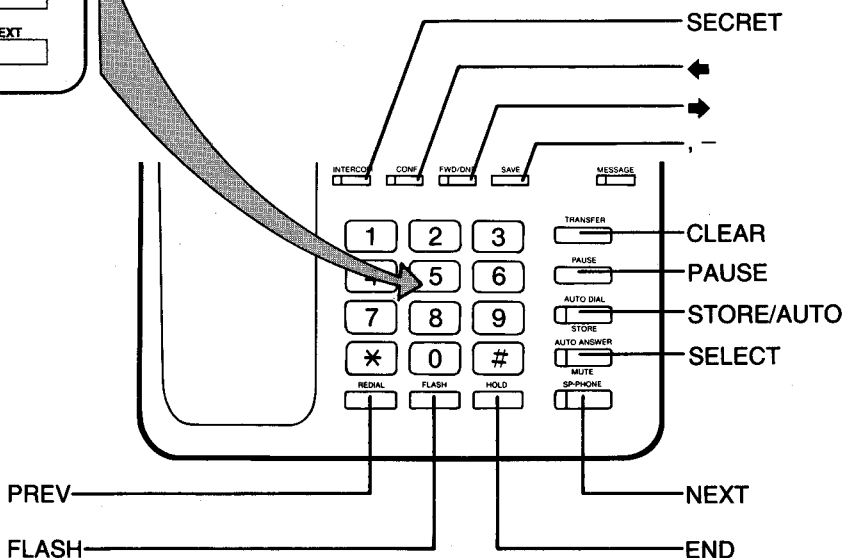

TO SET	PROGRAM ADDRESS	STEPS REQUIRED TO CHANGE PROGRAM																																																								
Date and Time	[00]	<p>[A] [⇌] [SELECT] [⇌] [B] [⇌] [SELECT] [⇌] [C] [⇌] [D] [⇌] [SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└---year┐ └---month┐ └--day┐ └---hour┐ └---minute┐ └---AM/PM</p> <p style="margin-left: 100px;">└--- day of the week</p>																																																								
System Speed Calling Entry	[01] or [AUTO]	<p>[AB] [CD] [phone number] [MEMORY]</p> <p style="margin-left: 20px;">└-----┐ [9]: automatic line access number</p> <p style="margin-left: 20px;">└-----┐ [81] through [83]: outside line access number</p> <p style="margin-left: 20px;">└-----┐ [00] through [79]: speed access code</p> <ul style="list-style-type: none"> • To advance to the next code. [SELECT] [AB] [CD] [phone number] [MEMORY] • To exit the speed calling entry, press [END]. 																																																								
System Speed Calling—Class Assignment	[02]	<p>[SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└--- until the desired boundary class appears</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 50%;"></th> <th style="text-align: center;">Default</th> <th colspan="3" style="text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>CLASS 1</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> </tr> <tr> <td>CLASS 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CLASS 3</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change			CLASS 1	x				CLASS 2					CLASS 3																																								
	Default	To make program change																																																								
CLASS 1	x																																																									
CLASS 2																																																										
CLASS 3																																																										
Dial Mode (Tone/Pulse) Selection	[03]	<p>[NEXT] [SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└-----┐ TONE/PULSE</p> <p style="margin-left: 20px;">└--- until the desired CO number appears</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 50%;"></th> <th style="text-align: center;">Default</th> <th colspan="3" style="text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>CO(s)</td> <td style="text-align: center;">all CO's</td> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> <td style="text-align: center;">3</td> </tr> <tr> <td>Pulse mode</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Tone (DTMF) mode</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change			CO(s)	all CO's	1	2	3	Pulse mode	x				Tone (DTMF) mode																																								
	Default	To make program change																																																								
CO(s)	all CO's	1	2	3																																																						
Pulse mode	x																																																									
Tone (DTMF) mode																																																										
Switching Mode (Day/Night Service)	[04]	<p>[SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└-----┐ MAN/AUTO</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 50%;"></th> <th style="text-align: center;">Default</th> <th colspan="2" style="text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Manual</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>Automatic</td> <td></td> <td style="text-align: center;">/</td> <td></td> </tr> </tbody> </table>		Default	To make program change		Manual	x			Automatic		/																																													
	Default	To make program change																																																								
Manual	x																																																									
Automatic		/																																																								
Starting Time (Day/Time)	[05]	<p>[A] [⇌] [B] [⇌] [SELECT] [MEMORY] [NEXT] [C] [⇌] [D] [⇌] [SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└---minute┐ └---AM/PM</p> <p style="margin-left: 20px;">└----- starting time for day service (hour)┐ └--- minute┐ └---AM/PM</p> <p style="margin-left: 100px;">└----- starting time for night service (hour)</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 50%;"></th> <th style="text-align: center;">Default</th> <th colspan="8" style="text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Day plan</td> <td style="text-align: center;">9:00 AM</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Night plan</td> <td style="text-align: center;">5:00 PM</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Day plan	9:00 AM									Night plan	5:00 PM																																		
	Default	To make program change																																																								
Day plan	9:00 AM																																																									
Night plan	5:00 PM																																																									
Flexible Day Outward Dialing Assignment	[06]	<p>[NEXT] [C...E] [MEMORY] [END]</p> <p style="margin-left: 20px;">└-----┐ CO number</p> <p style="margin-left: 20px;">└--- until the desired extension number appears</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 50%;"></th> <th style="text-align: center;">Default</th> <th colspan="10" style="text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td style="text-align: center;">11</td> <td style="text-align: center;">12</td> <td style="text-align: center;">13</td> <td style="text-align: center;">14</td> <td style="text-align: center;">15</td> <td style="text-align: center;">16</td> <td style="text-align: center;">17</td> <td style="text-align: center;">18</td> <td></td> </tr> <tr> <td>CO 1</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CO 2</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CO 3</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change										Extensions	all extensions	11	12	13	14	15	16	17	18		CO 1	x										CO 2	x										CO 3	x									
	Default	To make program change																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18																																																	
CO 1	x																																																									
CO 2	x																																																									
CO 3	x																																																									
Flexible Night Outward Dialing Assignment	[07]	<p>[NEXT] [C...E] [MEMORY] [END]</p> <p style="margin-left: 20px;">└-----┐ CO number</p> <p style="margin-left: 20px;">└--- until the desired extension number appears</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 50%;"></th> <th style="text-align: center;">Default</th> <th colspan="10" style="text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td style="text-align: center;">11</td> <td style="text-align: center;">12</td> <td style="text-align: center;">13</td> <td style="text-align: center;">14</td> <td style="text-align: center;">15</td> <td style="text-align: center;">16</td> <td style="text-align: center;">17</td> <td style="text-align: center;">18</td> <td></td> </tr> <tr> <td>CO 1</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CO 2</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CO 3</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change										Extensions	all extensions	11	12	13	14	15	16	17	18		CO 1	x										CO 2	x										CO 3	x									
	Default	To make program change																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18																																																	
CO 1	x																																																									
CO 2	x																																																									
CO 3	x																																																									

TO SET	PROGRAM ADDRESS	STEPS REQUIRED TO CHANGE PROGRAM
---------------	------------------------	---

Flexible Day Ringing Assignment

[08] [NEXT] [C...E] [MEMORY] [END]
 ----- CO number
 -----until the desired extension number appears

	Default	To make program change							
<i>Extensions</i>	<i>all extensions</i>	11	12	13	14	15	16	17	18
CO 1	x								
CO 2	x								
CO 3	x								

Flexible Night Ringing Assignment

[09] [NEXT] [C...E] [MEMORY] [END]
 ----- CO number
 -----until the desired extension number appears

	Default	To make program change							
<i>Extensions</i>	<i>all extensions</i>	11	12	13	14	15	16	17	18
CO 1	x								
CO 2	x								
CO 3	x								

Toll Restriction—Class Assignment

[10] [NEXT] [SELECT] [MEMORY] [END]
 ----- CLASS 1/2/3
 -----until the desired extension number appears

	Default	To make program change							
<i>Extensions</i>	<i>all extensions</i>	11	12	13	14	15	16	17	18
Class 1	x								
Class 2									
Class 3									

Toll Restriction—Denied Codes Assignment

[11] [NEXT] [C] [MEMORY] [END]
 ----- phone number with 7 digits
 -----until the desired memory location number appears

	Memory location number				
<i>Phone number entry</i>	00	01	02	03	04
	05	06	07	08	09
	10	11	12	13	14
	15	16	17	18	19

Toll Restriction—Exceptional Codes Assignment

[12] [NEXT] [C] [MEMORY] [END]
 ----- phone number with 7 digits
 -----until the desired memory location number appears

	Memory location number				
<i>Phone number entry</i>	00	01	02	03	04
	05	06	07	08	09
	10	11	12	13	14
	15	16	17	18	19

TO SET

PROGRAM ADDRESS

STEPS REQUIRED TO CHANGE PROGRAM

HOST PBX Access
Codes Assignment

[13]

[NEXT] [A...D] [MEMORY] [END]

-----Up to four outside access codes each with a maximum of 2 digits
-----until the desired CO numbers appears

CO	Outside access codes of the host PBX			
1				
2				
3				

Automatic Answering
(Automatic/Manual)
Selection

[14]

[NEXT] [SELECT] [MEMORY] [END]

-----AUTO ANSWER/MAN ANSWER
-----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Automatic	x								
Manual									

Preferred Line
Assignment

[15]

[NEXT] [SELECT] [MEMORY] [END]

-----..... (none)/CO 1/CO 2/CO 3
-----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
• • • • (none)	x								
CO 1									
CO 2									
CO 3									

Programmable Call
Waiting

[16]

[NEXT] [SELECT] [MEMORY] [END]

-----ENABLE/DISABLE
-----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Disable	x								
Enable									

Duration Time Count
Start Mode

[17]

[SELECT] [MEMORY] [END]

-----INSTANTLY/5S AFTER DIAL/10S AFTER DIAL

	Default	To make program change		
Instantly				
5S after dial	x			
10S after dial				

Hookswitch Flash Timing

[18]

[NEXT] [SELECT] [MEMORY] [END]

-----300 MS/600 MX/900 MS
-----until the desired extension number appears

	Default	To make program change		
CO (s)	all CO's	1	2	3
300 msec				
600 msec	x			
900 msec				

Disconnect Time

[19]

[NEXT] [SELECT] [MEMORY] [END]

-----1.5 SEC/4.0 SEC
-----until the desired CO number appears

	Default	To make program change		
CO (s)	all CO's	1	2	3
1.5 sec	x			
4.0 sec				

TO SET	PROGRAM ADDRESS	STEPS REQUIRED TO CHANGE PROGRAM																																																		
Calling Party Control (CPC) Signal	[20]	<p>[NEXT] [SELECT] [MEMORY] [END] ----- TONE CALL/VOICE CALL -----until the desired CO number appears</p> <table border="1" data-bbox="443 182 1202 286"> <thead> <tr> <th></th> <th>Default</th> <th colspan="3">To make program change</th> </tr> <tr> <td>CO (s)</td> <td>all CO's</td> <td>1</td> <td>2</td> <td>3</td> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change			CO (s)	all CO's	1	2	3	Enable	×				Disable																																		
	Default	To make program change																																																		
CO (s)	all CO's	1	2	3																																																
Enable	×																																																			
Disable																																																				
Intercom Alerting Mode	[21]	<p>[NEXT] [SELECT] [MEMORY] [END] ----- TONE CALL/VOICE CALL -----until the desired extension number appears</p> <table border="1" data-bbox="443 390 1202 494"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Tone call</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Voice call</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	Tone call	×									Voice call																			
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
Tone call	×																																																			
Voice call																																																				
Programmable Doorphone	[22]	<p>[NEXT] [SELECT] [MEMORY] [END] -----D-PHONE 1, 2/1/2/... (deny the ringing) -----until the desired extension number appears</p> <table border="1" data-bbox="443 598 1202 737"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Doorphone 1</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Doorphone 2</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>deny the ringing</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	Doorphone 1	×									Doorphone 2	×									deny the ringing									
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
Doorphone 1	×																																																			
Doorphone 2	×																																																			
deny the ringing																																																				
Dial Call Pickup Group Assignment	[23]	<p>[NEXT] [SELECT] [MEMORY] [END] ----- PICKUP-G:1/2/1, 2/... (out of the group) -----until the desired extension number appears</p> <table border="1" data-bbox="443 841 1202 972"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Pickup Group 1</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Pickup Group 2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>out of the group</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	Pickup Group 1	×									Pickup Group 2										out of the group									
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
Pickup Group 1	×																																																			
Pickup Group 2																																																				
out of the group																																																				
Busy Tone Selection	[24]	<p>[SELECT] [MEMORY] [END] ----- TONE 1/2</p> <table border="1" data-bbox="443 1050 1202 1128"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>Tone 1</td> <td>×</td> <td></td> <td></td> </tr> <tr> <td>Tone 2</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		Tone 1	×			Tone 2																																									
	Default	To make program change																																																		
Tone 1	×																																																			
Tone 2																																																				
Hold Recall Time Set	[26]	<p>[SELECT] [MEMORY] [END] ----- 30SEC/1 MIN/2 MIN/3 MIN/4 MIN/5 MIN/DISABLE</p> <table border="1" data-bbox="443 1215 1202 1310"> <thead> <tr> <th></th> <th>30 seconds</th> <th>1 minute</th> <th>2 minutes</th> <th>3 minutes</th> <th>4 minutes</th> <th>5 minutes</th> <th>disable</th> </tr> </thead> <tbody> <tr> <td>Default</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>To make program change</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		30 seconds	1 minute	2 minutes	3 minutes	4 minutes	5 minutes	disable	Default								To make program change																																	
	30 seconds	1 minute	2 minutes	3 minutes	4 minutes	5 minutes	disable																																													
Default																																																				
To make program change																																																				
Programmable External Paging Access Tone	[27]	<p>[SELECT] [MEMORY] [END] ----- ENABLE/DISABLE</p> <table border="1" data-bbox="443 1397 1202 1475"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		Enable	×			Disable																																									
	Default	To make program change																																																		
Enable	×																																																			
Disable																																																				
DTMF Receiver Check	[28]	<p>[NEXT][SELECT][MEMORY][END] ----- ENABLE/DISABLE -----until the desired DTMF receiver appears</p> <table border="1" data-bbox="443 1579 1202 1683"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>DTMF receiver</td> <td>1, 2</td> <td>1</td> <td>2</td> </tr> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		DTMF receiver	1, 2	1	2	Enable	×			Disable																																					
	Default	To make program change																																																		
DTMF receiver	1, 2	1	2																																																	
Enable	×																																																			
Disable																																																				

TO SET **PROGRAM ADDRESS** **STEPS REQUIRED TO CHANGE PROGRAM**

Programmable Secret Auto Dial

[29]

[SELECT] [MEMORY] [END]
 -----NO SECRET/SECRET

	Default	To make program change							
No secret	x								
Secret									

Transfer Recall Time

[30]

[SELECT] [MEMORY] [END]
 -----30 SEC/2 MIN

	Default	To make program change							
30 sec	x								
2 min									

Automatic Designated CO Line Access

[31]

[NEXT] [C...E] [MEMORY] [END]
 -----CO number
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
CO 1	x								
CO 2	x								
CO 3	x								

Programmable Call Waiting Tone

[32]

[NEXT] [SELECT] [MEMORY] [END]
 -----TONE 1/TONE 2
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Tone 1	x								
Tone 2									

Programmable Executive Override

[33]

[NEXT] [SELECT] [MEMORY] [END]
 -----ENABLE/DISABLE
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Enable									
Disable	x								

Standard Telephone Connection with Proprietary Telephone

[34]

[NEXT] [SELECT] [MEMORY] [END]
 -----ENABLE/DISABLE
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Enable									
Disable	x								

FI/SAVE Selection (for KX-T30850, KX-T7020, KX-T7030, KX-T7050)

[35]

[NEXT] [SELECT] [MEMORY] [END]
 -----FEATURE KEY/SAVE KEY
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Feature Key	x								
Save Key									

Selectable Call-on-Hold Music Source

[36]

[SELECT] [MEMORY] [END]
 -----INTERNAL/EXTERNAL

	Default	To make program change							
Internal	x								
External									

Station Program Clear

[98]

[NEXT] [MEMORY] [END]

System Clear

[99]

[NEXT] [MEMORY] [END]