



When the System Program Switch on the KX-T61610B is set to the PROGRAM position, the operation of the KX-T7030 and the KX-T7130 connected to extension 11 will change as follows.

KX-T7030

โทรศัพท์ชั้นแนล พี. เอ. บี. เอ็กซ์.
 30/270 ซอยนวมินทร์ 80 แขวงนวลจันทร์ เขตบึงกุ่ม กรุงเทพฯ 10230
 Hotline : 084-920-5065 Tel : 02-519-1718 , 02-107-3057
 E.Mail : info@pfpbx.com , jirasak_service@hotmail.com
 www.pfpbx.com

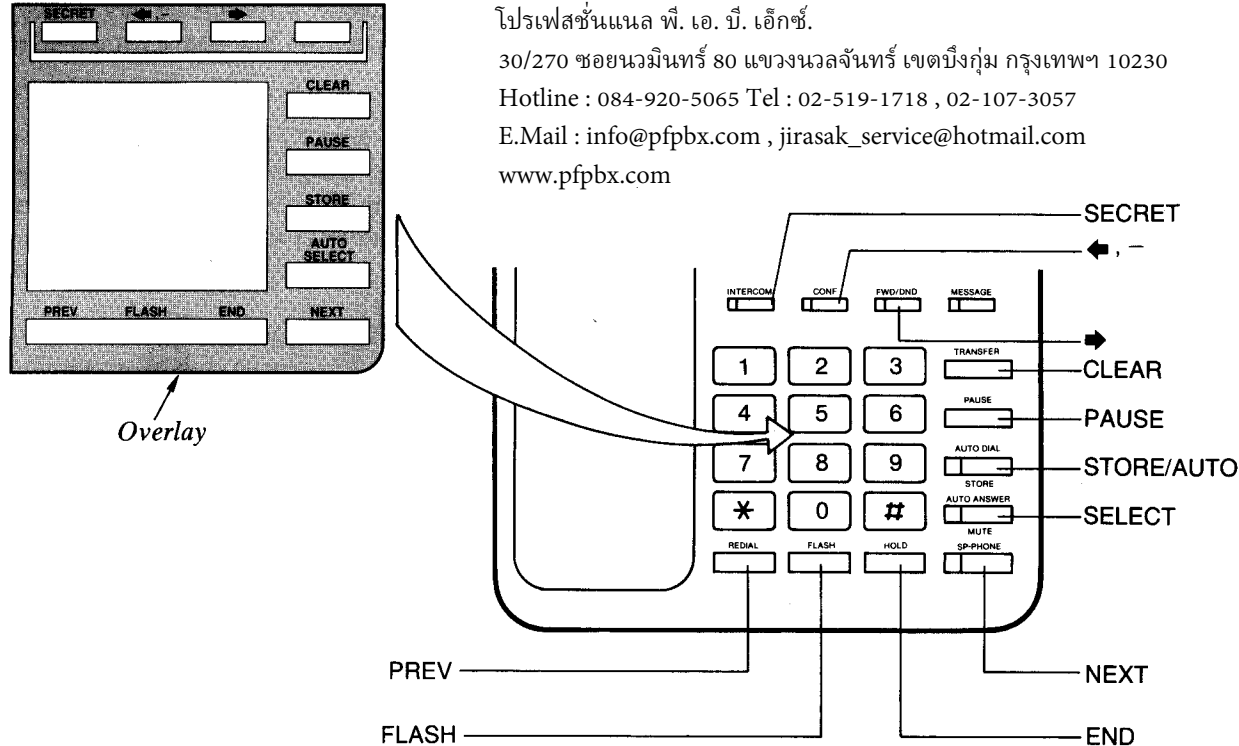

KX-T7130

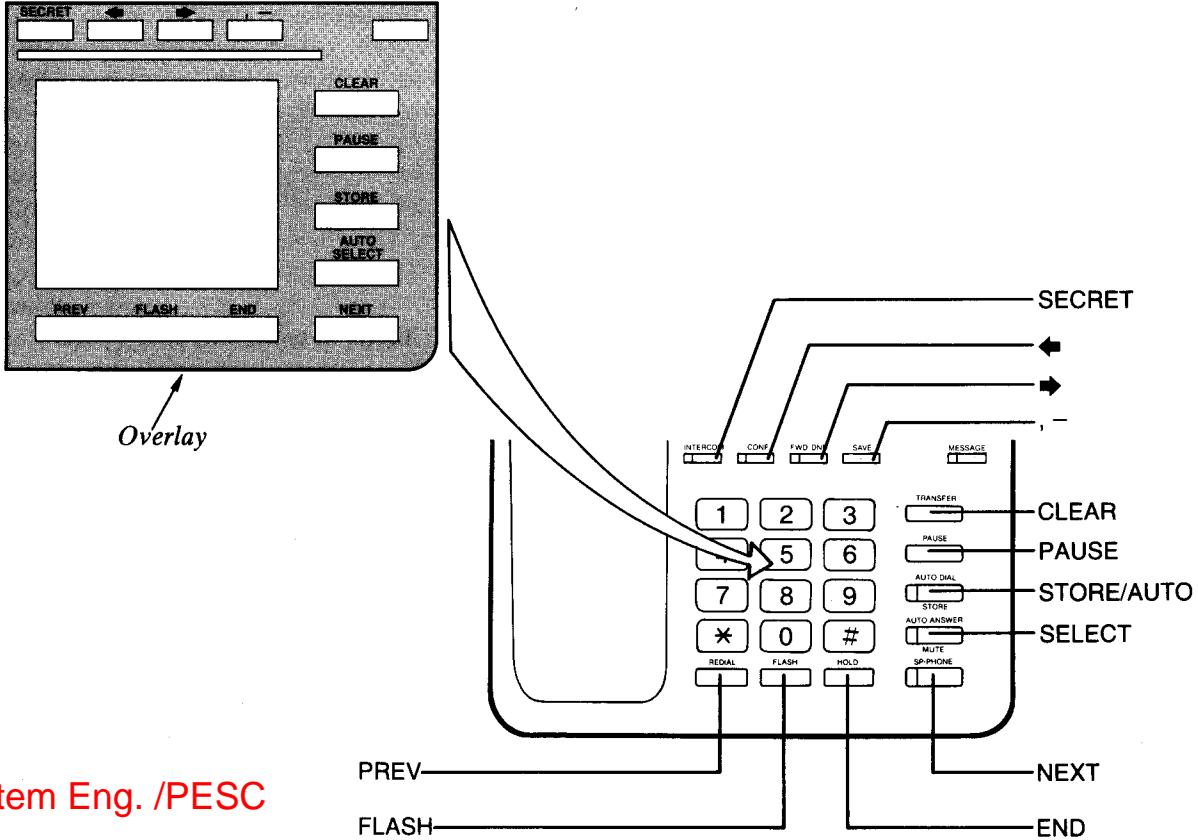

TO SET

PROGRAM ADDRESS

STEPS REQUIRED TO CHANGE PROGRAM

Duration Time
Count Start Mode

[23]

[SELECT] [MEMORY] [END]

..... INSTANTLY/5S AFTER DIAL/10S AFTER DIAL

	Default	To make program change
Instantly		
5S after dial	×	
10S after dial		

SMDR
Communication
Parameters

[24]

(Carriage return for a new line)

[SELECT] [MEMORY]

..... CR + LF/CR

	Default	To make program change
CR + LF	×	
CR		

(Baud rate)

[NEXT] [SELECT] [MEMORY]

..... 110B/150B/300B/600B/1200B/2400B/4800B/9600B

	110B	150B	300B	600B	1200B	2400B	4800B	9600B
Default					×			
To make program change								

(Word length)

[NEXT] [SELECT] [MEMORY]

..... 7 BITS/8 BITS

	Default	To make program change
7 BITS	×	
8 BITS		

(Parity)

[NEXT] [SELECT] [MEMORY]

..... NONE/MARK/SPACE/EVEN/ODD

	None	Mark	Space	Even	Odd
Default		×			
To make program change					

(Stop bit length)

[NEXT] [SELECT] [MEMORY]

..... 1 BIT/2 BITS

	Default	To make program change
1 BIT	×	
2 BITS		

(Page length)

[NEXT] [AB] [MEMORY]

..... 4 through 99 lines

	Default	To make program change
Lines per page	66	

(Skip perforation)

[NEXT] [AB] [MEMORY] [END]

..... 0 through 95 lines

	Default	To make program change
Skipping lines	0	

System Data Dump

[25]

• START OUTPUT
[MEMORY] [END]
..... START

• STOP OUTPUT
[SELECT] [MEMORY] [END]
..... until the STOP appears

TO SET

PROGRAM ADDRESS

STEPS REQUIRED TO CHANGE PROGRAM

[26] [SELECT] [MEMORY] [NEXT] [SELECT] [MEMORY] [END]
 -----OUTGOING: ON/OFF -----INCOMING: ON/OFF

	Outgoing		Incoming	
	ON	OFF	ON	OFF
Default	×		×	
To make program change				

[27] [NEXT] [SELECT] [MEMORY] [END]
 -----AUTO ANSWER/MAN ANSWER
 -----until the desired extension number appears

	Default	To make program change															
	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
Extensions																	
Automatic	×																
Manual																	

[28] [SELECT] [MEMORY] [END]
 ----- 30SEC/1 MIN/2 MIN/3 MIN/4 MIN/5 MIN/DISABLE

	30 seconds	1 minute	2 minutes	3 minutes	4 minutes	5 minutes	Disable
	Default	×					
To make program change							

[29] [SELECT] [MEMORY] [END]
 ----- ENABLE/DISABLE

	Default	To make program change
	Enable	×
Disable		

[30] [SELECT] [MEMORY] [END]
 ----- NO SECRET/SECRET

	Default	To make program change
	No secret	×
Secret		

[31] [NEXT] [SELECT] [MEMORY] [END]
 ----- 300 MS/600 MS/900 MS
 -----until the desired CO number appears

	Default	To make program change					
	all CO's	1	2	3	4	5	6
CO(s)							
300 msec							
600 msec	×						
900 msec							

[32] [NEXT] [SELECT] [MEMORY] [END]
 ----- 1.5 SEC/4.0 SEC
 -----until the desired CO number appears

	Default	To make program change					
	all CO's	1	2	3	4	5	6
CO(s)							
1.5 sec	×						
4.0 sec							

[33] [NEXT] [SELECT] [MEMORY] [END]
 ----- ENABLE/DISABLE
 -----until the desired CO number appears

	Default	To make program change					
	all CO's	1	2	3	4	5	6
CO(s)							
Enable	×						
Disable							

TO SET

PROGRAM ADDRESS

STEPS REQUIRED TO CHANGE PROGRAM

DSS Button Mode	[34]	<p>[SELECT] [MEMORY] [END] -----WITHOUT TRANSFER/WITH TRANSFER</p> <table border="1" data-bbox="342 154 1098 235"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>Without transfer</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>With transfer</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		Without transfer	x			With transfer																																																															
	Default	To make program change																																																																								
Without transfer	x																																																																									
With transfer																																																																										
DTMF Receiver Check	[35]	<p>[NEXT] [SELECT] [MEMORY] [END] -----ENABLE/DISABLE -----until the desired DTMF receiver appears</p> <table border="1" data-bbox="342 341 1098 446"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>DTMF receiver</td> <td style="text-align: center;">1, 2</td> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> </tr> <tr> <td>Enable</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		DTMF receiver	1, 2	1	2	Enable	x			Disable																																																											
	Default	To make program change																																																																								
DTMF receiver	1, 2	1	2																																																																							
Enable	x																																																																									
Disable																																																																										
Transfer Recall Time	[36]	<p>[SELECT] [MEMORY] [END] -----30 SEC/2 MIN</p> <table border="1" data-bbox="342 527 1098 609"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> </thead> <tbody> <tr> <td>30 seconds</td> <td style="text-align: center;">x</td> <td></td> <td></td> </tr> <tr> <td>2 minutes</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		30 seconds	x			2 minutes																																																															
	Default	To make program change																																																																								
30 seconds	x																																																																									
2 minutes																																																																										
Standard Telephone Connection with Proprietary Telephone	[37]	<p>[NEXT] [SELECT] [MEMORY] [END] -----ENABLE/DISABLE -----until the desired extension number appears</p> <table border="1" data-bbox="342 738 1283 852"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Enable</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Disable</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Enable																		Disable	x																
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Enable																																																																										
Disable	x																																																																									
FI/SAVE Selection	[38]	<p>[NEXT] [SELECT] [MEMORY] [END] -----FEATURE KEY/SAVE KEY -----until the desired extension number appears</p> <table border="1" data-bbox="342 982 1283 1096"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Feature key</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Save key</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Feature key	x																	Save key																	
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Feature key	x																																																																									
Save key																																																																										
F3/FWD Selection	[39]	<p>[NEXT] [SELECT] [MEMORY] [END] -----FEATURE KEY/FWD, DND KEY -----until the desired extension number appears</p> <table border="1" data-bbox="342 1226 1283 1356"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Feature key</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>FWD/DND key</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Feature key	x																	FWD/DND key																	
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Feature key	x																																																																									
FWD/DND key																																																																										
Programmable Executive Override	[40]	<p>[NEXT] [SELECT] [MEMORY] [END] -----ENABLE/DISABLE -----until the desired mode appears</p> <table border="1" data-bbox="342 1494 1283 1599"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td> </tr> <tr> <td>Disable</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Enable</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Disable	x																	Enable																	
	Default	To make program change																																																																								
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																									
Disable	x																																																																									
Enable																																																																										

TO SET	PROGRAM ADDRESS	STEPS REQUIRED TO CHANGE PROGRAM																																																																																																																																																
Automatic Designated CO Line Access	[41]	<p> </p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> <tr> <th>Extensions</th> <th>all extensions</th> <th>11</th><th>12</th><th>13</th><th>14</th><th>15</th><th>16</th><th>17</th><th>18</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th><th>24</th><th>25</th><th>26</th> </tr> </thead> <tbody> <tr> <td>CO 1</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 2</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 3</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 4</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 5</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 6</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	CO 1	x																	CO 2	x																	CO 3	x																	CO 4	x																	CO 5	x																	CO 6	x																
	Default	To make program change																																																																																																																																																
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																																																																																																	
CO 1	x																																																																																																																																																	
CO 2	x																																																																																																																																																	
CO 3	x																																																																																																																																																	
CO 4	x																																																																																																																																																	
CO 5	x																																																																																																																																																	
CO 6	x																																																																																																																																																	
Programmable Call Waiting Tone	[42]	<p> </p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th colspan="16">To make program change</th> </tr> <tr> <th>Extensions</th> <th>all extensions</th> <th>11</th><th>12</th><th>13</th><th>14</th><th>15</th><th>16</th><th>17</th><th>18</th><th>19</th><th>20</th><th>21</th><th>22</th><th>23</th><th>24</th><th>25</th><th>26</th> </tr> </thead> <tbody> <tr> <td>Tone 1</td> <td>x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Tone 2</td> <td></td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change																Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	Tone 1	x																	Tone 2																																																																																									
	Default	To make program change																																																																																																																																																
Extensions	all extensions	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26																																																																																																																																	
Tone 1	x																																																																																																																																																	
Tone 2																																																																																																																																																		
Selectable Call-on-Hold Music Source	[44]	<p> [SELECT] [MEMORY] [END] INTERNAL/EXTERNAL </p> <table border="1"> <thead> <tr> <th></th> <th>Default</th> <th>To make program change</th> </tr> </thead> <tbody> <tr> <td>Internal</td> <td>x</td> <td></td> </tr> <tr> <td>External</td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change	Internal	x		External																																																																																																																																									
	Default	To make program change																																																																																																																																																
Internal	x																																																																																																																																																	
External																																																																																																																																																		

● Program Address number [43] does not work with your EMSS Control Unit.